




GROWTH THROUGH INNOVATION

ARE YOU READY FOR YOUR WATER CHILLER? (TT15)

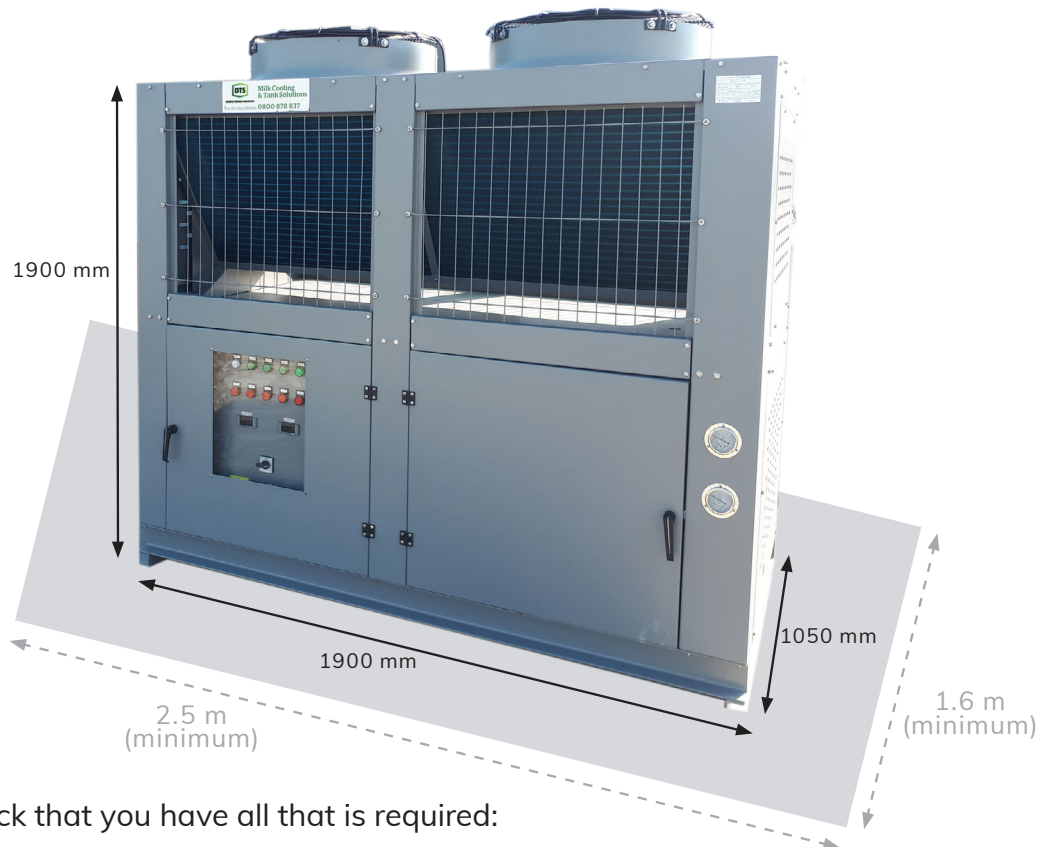

Please check that you have all that is required:

- ✓ water tank organised and ground work completed
- ✓ concrete pad for chiller completed (minimum dimensions in the picture above, however, we recommended at least 1 m clearance around the entire water chiller for access and air flow)
- ✓ electrical outlet
- ✓ secondary or double bank plate cooler ordered, with location determined and site prepared
- ✓ chiller to plate cooler pump ordered, with location determined and site prepared
- ✓ clean water supply to fill the storage tank and for use in the chilled water circuit
- ✓ sufficient power (3 phase; power input 10.5 kW; FLA 43)

Talk to your local Area Sales Manager for advice on any of these requirements.

0800 500 387
WWW.DTS.CO.NZ